


658255 PIN VALVE FLANGED EN 1759-1 CLASS 150 WITH GRADUATE HANDWHEEL




PIN valve
Drive: GRADUATE Handwheel
Connection: Revolving threaded flanges EN 1759-1 CLASS 150
Material: Aisi 316L (1.4404)
Measure: from 1/2" to 1"
Operating temperature: -20°C+160°C
Outer finish: Polished

On request:
Antistatic device ATEX:
II 2G Ex h IIC T4 Gb
II 2D Ex h IIIC T135°C Db
M.O.C.A. CE 1935/2004

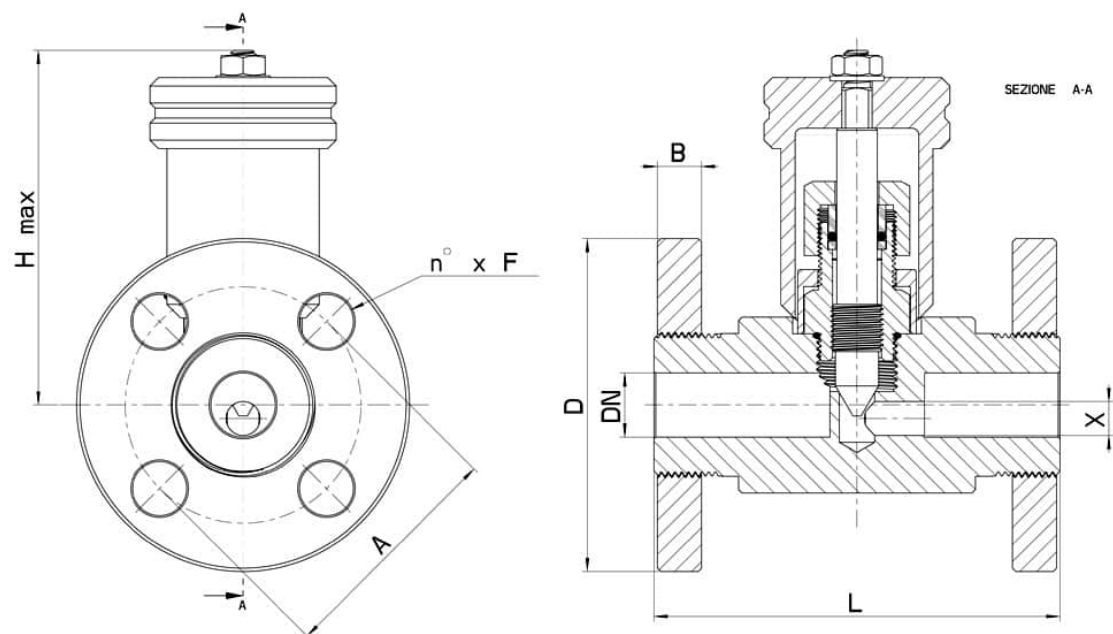

CLASS 150	DN	L	H	X	D	B	A	F	KG	CODE AISI 316L
1/2"	15	115	80	6	88,9	9,5	60.6	4x16	-	658255 61400
3/4"	20	120	117	10	98,4	11,1	69.8	4x16	-	658255 62000
1"	25	125	117	10	108	12,7	79.4	4x16	-	658255 62600

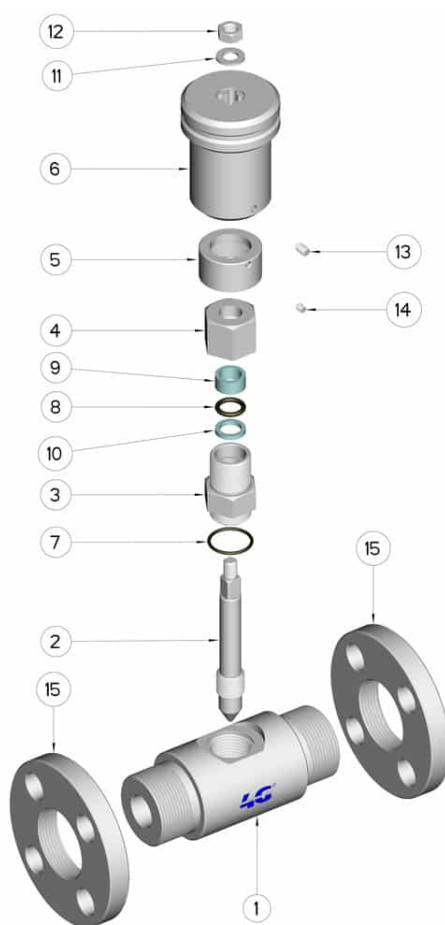

POS.	DENOMINATION	PCS	MAT.
1	Body	1	AISI 316L
2	Spillo	1	AISI 316L
3	Vitone	1	AISI 316L
4	Dado premistoppa	1	AISI 316L
5	Anello graduato	1	AISI 316L
6	Volantino graduato	1	AISI 304L
7	OR	1	FKM
8	OR	1	FKM
9	Seal	1	PTFE Caricato Vetro/With glass
10	Seal	1	PTFE
11	Washer	1	AISI 304L
12	Nut	1	AISI 304L
13	SCREW	1	AISI 304L
14	SCREW	1	AISI 304L
15	Flanges	2	AISI 316L

